

Product information | TECHNICAL DATA SHEET

VICE. Solid Colors. Satin paint, high pressure, excellent coverage, and ultra-fast drying.
400 ml, 11 Oz, 312 g.

GENERAL DESCRIPTION

Basically, this spray paint was made to hit the streets. 400 mL of high-pressure power in a tight lineup of 50 satin-finish colors.

Warning: this product may cause addiction or compulsive overuse, potentially affecting your ability to function in normal society.

FEATURES

- Fast drying.
- Good hardening.
- Excellent flexibility.
- Strong resistance to scratching once the film is polymerized.
- Does not contain lead nor other heavy metals.
- Good covering capability.
- Retains its glossiness and color.
- Easy to apply and repaint.
- Very good resistance to the sun and rain.
- Very good resistance to UV light (see chart).

INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

Valve::	female valve
Propellant:	GLP C3-C4
Binding type:	Acrylic
Color:	See chart
Dry to the touch (ASTM D-1640 ISO 1517):	5-11'
Completely dry (ASTM D-1640 ISO 1517):	12 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Adherence (ASTM D-3359 ISO 2409):	0 B
Theoretical yield (continuous painting):	3 m ² for 400 ml aerosol
Product life:	(Almacenado correctamente) 10 years
Condition for application:	T 5°C a 40°C
	Humedad Máx. 85% R.H.P
Repainting/varnishing time:	Between 15 minutes and 2 hours.

* All of the adherence tests have been carried out on iron plates.

APPLICATIONS

Without encouraging (or discouraging) any unlawful behavior, let's just say that this aerosol is perfect for painting:


- Billboards
- Metal shutters
- Freight containers
- Train and metro cars
- Legal "grey" areas

APPEARANCE

DONUT
Indicates
the paint color



LABEL

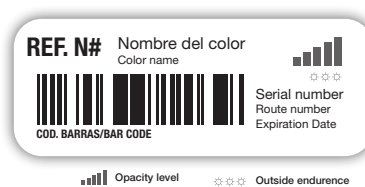

CAP SYSTEM



COLORES 50 Colors



Due to technical reasons this color chart might not reproduce the real colors. For accurate color reference see the spray can's Donut. © Montana Colors 2025.

PACKAGING

Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: GLP – HC C₃-C₄

Box (6 units)
205 X 140 X 200 mm.



DISPLAY RACK 50 Colors

Height / Width / Depth
206 x 45,5 x 49 cm.
Capacity: 324 sprays.
References: 54.

SPAT2405332*

